


## Specifications

AUGER MOVER	CONVENTIONAL AUGER SIZE
C502	8" x 46' and under
C503	8" x 51' and over
C504	10" x 41' and under
C505	10" x 51' and over
C506	13" x 36'

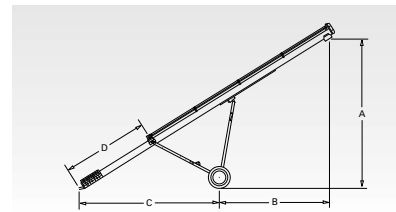

MODEL	831	836	841	851	861	1031	1036	1041	1051	1061	1336
A, up	16' 0"	18' 1"	28' 3"	35' 2"	42' 0"	16' 0"	16' 8"	28' 3"	35' 2"	42' 0"	19' 1"
A, down	8' 5"	10' 0"	12' 2"	13' 2"	13' 0"	8' 5"	9' 5"	10' 5"	12' 10"	13' 0"	9' 9"
B, up	11' 11"	14' 10"	13' 6"	15' 8"	21' 5"	11' 11"	13' 3"	13' 11"	16' 10"	21' 5"	13' 2"
B, down	13' 2"	14' 0"	18' 2"	22' 1"	29' 2"	13' 2"	13' 8"	18' 1"	22' 2"	29' 2"	14' 3"
C, up	14' 3"	16' 9"	15' 4"	20' 0"	23' 2"	14' 3"	17' 10"	15' 3"	19' 0"	23' 2"	16' 4"
C, down	16' 0"	19' 8"	21' 7"	26' 10"	30' 6"	16' 0"	20' 8"	21' 5"	26' 9"	30' 6"	19' 5"
D	8' 6"	12' 2"	12' 3"	14' 1"	6' 0"	8' 4"	12' 7"	11' 10"	14' 2"	6' 1"	10' 10"

MODEL	831	836	841	851	861	1031	1036	1041	1051	1061	1336
Tube width	8"					10"					13"
Tube length	31'	36'	41'	51'	61'	31'	36'	41'	51'	61'	36'
Wheel track	6' 0"	6' 6"	7' 6"	8' 2"	10' 2"	6' 0"	6' 6"	7' 8"	9' 9"	10' 2"	7' 5"
Belt drives	Double	Double	Double	Double	n/a	Triple	Triple	Triple	Triple	n/a	Triple
Tube (gauge)	10 gauge					7 gauge					¼"
- Top	14	14	14	14	14	14	13	13	13	13	12
- Center	-	-	-	-	14	-	-	-	-	12	-
- Bottom	-	14	14	14	14	-	12	12	12	12	12
Flighting	10 gauge					7 gauge					¼"
Flighting shaft	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 3/8"	2 3/8"	2 3/8"	2 3/8"	2 3/8"	2 3/8"	2 3/8"
Drive line	1 ¼"	1 ¼"	1 ¼"	1 ¼"	1 3/8"	1 3/8"	1 3/8"	1 3/8"	1 3/8"	1 3/8"	1 ½"
HP gasoline (3450 RPM)	10 - 12	10 - 12	12 - 16	18 - 20	n/a	18	22	24	28	n/a	30
- Belt pulley	3 ½"	3 ½"	3 ½"	3 ½"	n/a	3 ½"	3 ½"	3 ½"	3 ½"	n/a	3 ½"
HP electric (1725 RPM)	9	10	12	15	15	15	17	18	20	20	22
- Belt pulley	6"	6"	6"	6"	n/a	6"	6"	6"	6"	n/a	6"
- Direct pulley	3 ½"	3 ½"	3 ½"	3 ½"	3 ½"	3 ½"	3 ½"	3 ½"	3 ½"	3 ½"	3 ½"

